



UT447E Top Spud Urinal TEU1LN12#CP 0.5GPF Eco EFV

- Low consumption 0.5 gallon per flush
- Compact design with privacy shields
- 14" elongated rim for all handicap applications
- Washout flush action

Vitreous china low consumption washout urinal. Includes wall hangers, 3/4" inlet spud, 2" I.P.S. outlet flange and rubber gasket. ADA Compliant.

■ UT447E

Low consumption washout urinal Top Spud Inlet

UT447EV

Low consumption washout urinal Back Spud Inlet

Colors:

Standard #01 Cotton
Optional See price book for

additional colors

Recommended flushometer valve: TOTO Electronic Flush Valves are highly recommended for maximum performance.



UT447E

Low Consumption Washout Urinal

■ SPECIFICATIONS

Water Use: 0.5 Gpf Flush System: Washout flush

action

Warranty: One Year Limited

Warranty

Material: Vitreous china Min, Water Pressure: 15psi (flowing)

Height (Urinal Only) 27³/₁₆" Width 18" Rim 14"

Shipping Weight: UT447E / UT447EV

66 lbs.

Shipping Dimensions: UT447E / UT447EV

29⁷/₈"L x 16³/₄"W

x 191/8"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B 45 requirements.

Listing / Approvals: IAPMO/c-UPC, CSA, City of Los Angeles, State of Massachusetts, and others.




Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of rim is 17" maximum from the finished floor.

Note: Refer to manufacturer's instructions and local codes for proper flushometer valve installation and requirements


Recommended carrier:

Jay R. Smith 0636 (Wall Hanger) 0637 (Wall Hanger with bottom)

These dimensions and specifications are subject to change without notice.

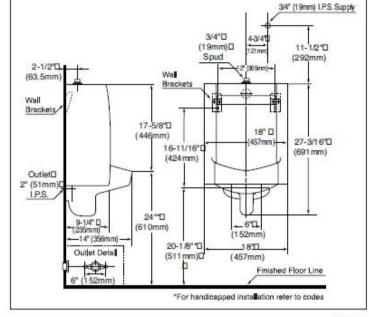

UT447E

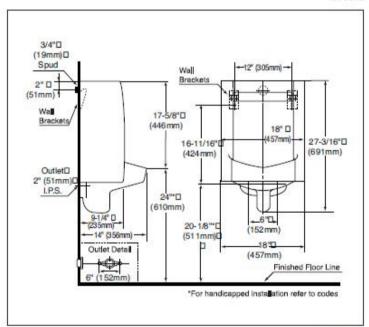

UT447EV

