

Flushometer Toilet, 1.28GPF when used with High Efficiency Flushometer Valve

FEATURES

- Floor-mounted
- Elongated front bowl
- Optional SanaGloss® ceramic glaze - SanaGloss glaze prevents debris, mold and bacteria from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning.
- 10" -12" rough-in

MODELS

- CT705ENG
Commercial floor-mounted toilet with SanaGloss ceramic glaze
- CT705EN
Commercial floor-mounted toilet

ADDITIONAL ITEMS (sold separately)

- SC534 seat
- SC134 seat



SanaGloss

FLUSH VALVES			
EcoPower®	Manual	DC Valves	AC Valves
TET3LN32#SS	TMT1LN32#CP	TET3DNS-32	TETANSR-32
TET3GN32#SS		TET2DNS-32	TET2ANS-32
TET2LN32#SS			
TET2GN32#SS			
TET1LN32#CP			
TET6LN32#CP			
TET1GNC-32			
TET6GNC-32			

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO (cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance

PRODUCT SPECIFICATION

The floor-mounted, low consumption siphon jet flushing toilet shall be 1.28GPF/4.8LPF when paired with a 1.28GPF flushometer valve. Toilet shall be elongated front bowl and SanaGloss ceramic glaze (CT705ENG). Toilet shall be TOTO Model CT705E_____.

Item No	Description
07775	TOTO INOD FLUSH ELONG WHT CT705EN-01
Item No	Available Seats
07750	TOTO ASIENTO U-SHAPE ELG WHT SC534-01
07604	TAPA PLASTICA ELNG U-SHAPE BLANCA I-2090


CT705EN

Flushometer Toilet, 1.28GPF when used with
High Efficiency 1.28GPF Flushometer Valve)




SPECIFICATIONS

- Water Use 1.28GPF/4.8LPF
- Flush System Siphon jet flushing action
- Min. Water Pressure 35 psi (flowing)
- Min. Flow Rate 23 GPM
- Water Surface 10-1/4" x 9-5/8"
- Trap Diameter 1-7/8"
- Rough-in 12", or 10"
- Trap Seal 2-3/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight CT705EN(G) - 52.5lbs
- Shipping Dimensions CT705EN(G)
26-1/2"L x 9-1/2" W¹ x 16-1/4"W² x 17"H

INSTALLATION NOTES

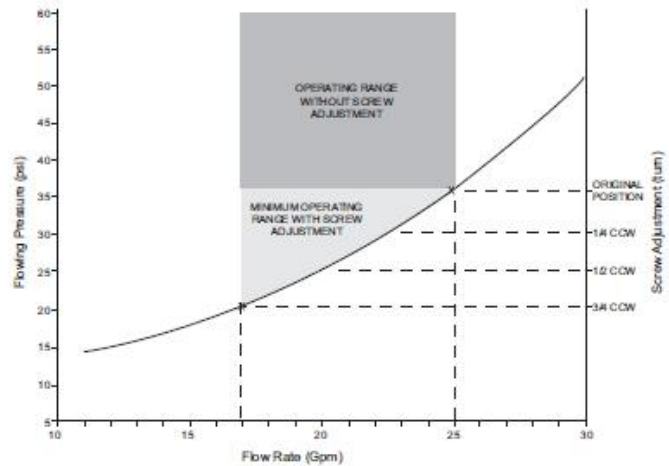

Water pressures over 80 psi are not recommended for most plumbing fixtures.

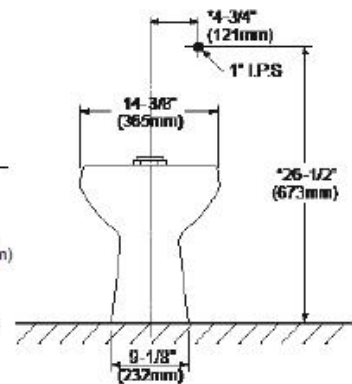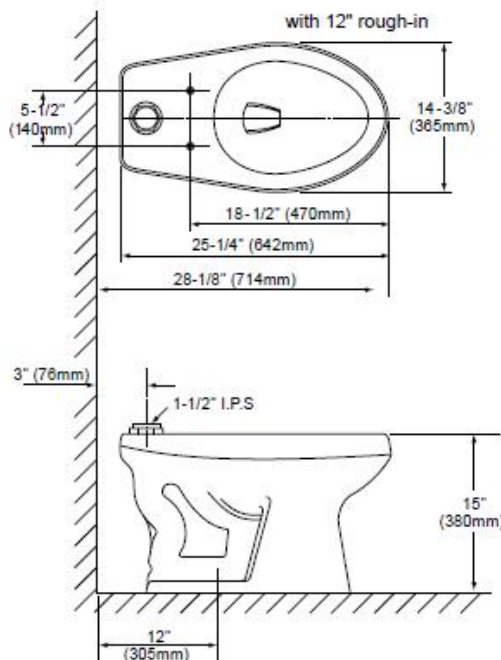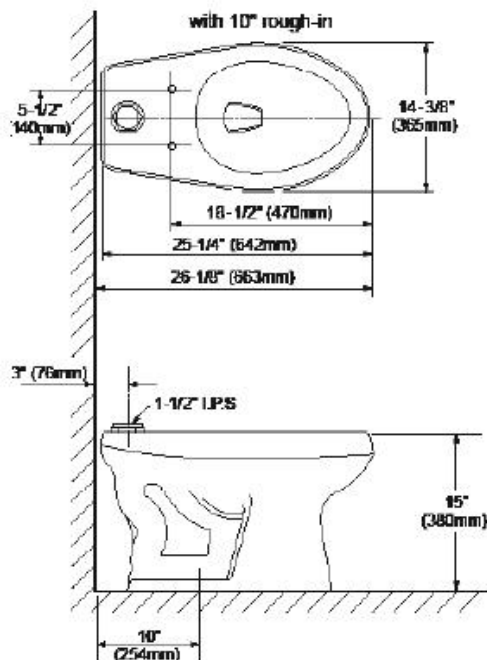

TOTO®

Perfection by Design